





Segment Bollard

External lighting



Architectural bollard in four heights with 1 or 2 vertical strips of LED light. Suitable for pathways, gardens, driveways or landscape areas.

Construction: Extruded aluminium body. Internal LED Driver. IP65, IK10.

Lens: Opal Strip.

Installation: Flanged, with Anchor Bolts.

Finish: Light Grey as standard. Anthracite Grey on request.

LED: 1.5W to 9W LED. 4000K as standard, 2700K or 3000K on request.

Driver: Internal, 220-240V AC 50/60 Hz.


Options: Different Heights, 1 LED strip (asymmetric) or 2 LED strips, different finishes available, 24V option.

Manufactured: EU.

Product Compliance: EN 60598, CE.

Veelite

DIMENSIONS

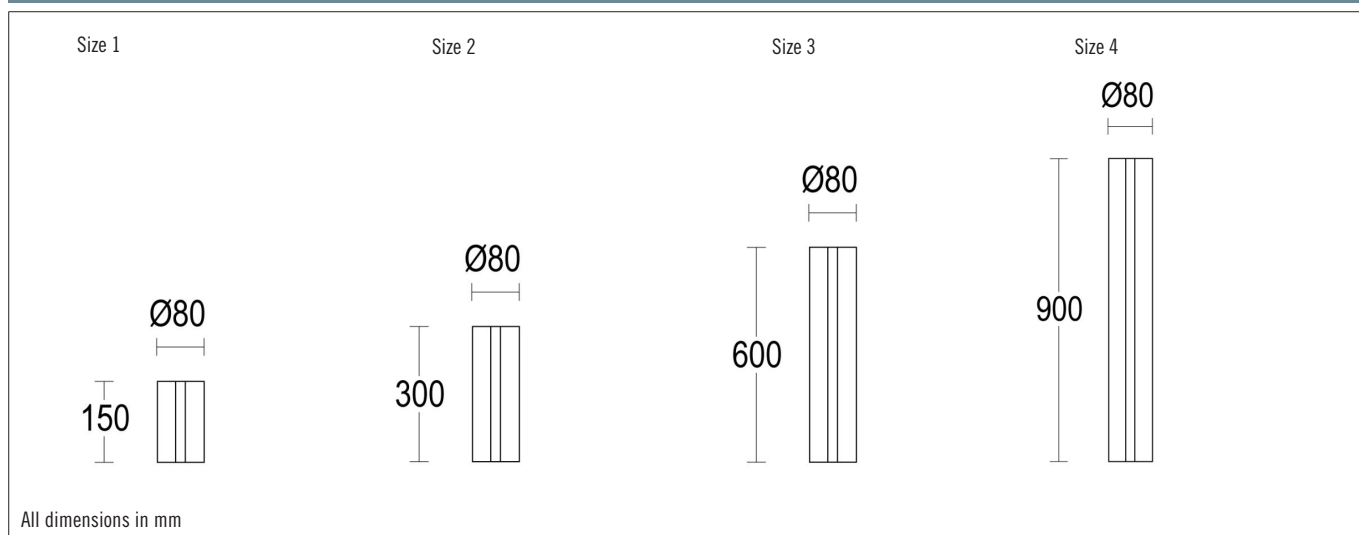

ORDERING CODE

Wattage *	Type	Code (1L)	Code (2L)	Size	Details	+J Bolts	Lumens*
1.5W	LED	GH0980.BAX0400	GH0984.BGX0400	1	Segment Bollard 4000K, Flanged	GAC571	104 lm
3W	LED	GH0981.BGX0400	GH0985.AHX0400	2	Segment Bollard 4000K, Flanged	GAC571	207 lm
6W	LED	GH0982.AHX0400	GH0986.BRX0400	3	Segment Bollard 4000K, Flanged	GAC571	414 lm
9W	LED	GH0983.LVX0400	GH0987.BUX0400	4	Segment Bollard 4000K, Flanged	GAC571	621 lm

OPTIONS

.05: Anthracite Grey Finish
.19: Light Grey Finish
27K: 2700K Warm White
3K: 3000K Warm White
DALI: DALI Dimming
24V: 24V Version

* Source Lumens for 1L version. Note 2L version will be double the lumens and double the power.

J Bolts GAC571

