




Trace LED

Ground Light



Ground recessed trimless linear uplighter available in single sections or can combine to form continuous lengths. Opal wide angled lens (35mm width) produces a glow of illumination along its length. Available in ground or wall version.

Construction: Aluminium housing, glass lens. IP68. IK10.

Installation Frame: Stainless steel frame to be laid before path/road manufacture. Frame joiner required for connecting 1 or more Trace luminaires together at each junction (4 maximum at 90 degree angles). Trace supplied with 0.5m in/out cables as standard (Connector and/or end cap required). Drainage Area of 200mm underneath Luminaire required.

Lens: White frosted tempered glass lens, 110° beam. Max static pressure load - 500 Kg.

LED: 3.5w (250mm long section), 7w (500mm long section) or 14w (1000mm long section). 4K as standard, 3K on request. Sections can be combined to form continuous lengths. RGB colour changing version available on request.

Driver: Remote 24 VDC driver required. Additional RGB controller required for colour changing version.




Manufactured: EU.

Product Compliance: EN 60598; CE.


Warning: Groundlights can be a glare, slip, trip or burn hazard. Vandalism or accidental breakage can result in electrical, glass or trip hazard. Locate to avoid or minimise these hazards.



Sample - Connection Scheme

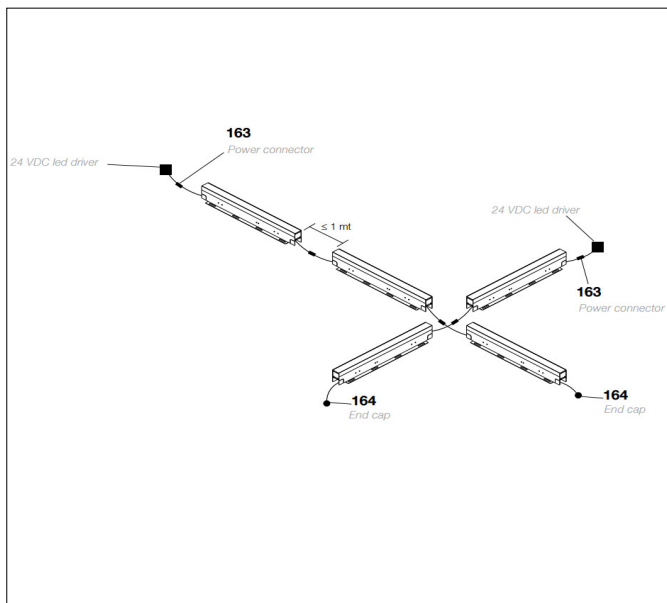


Sample - Installation Frame Layout

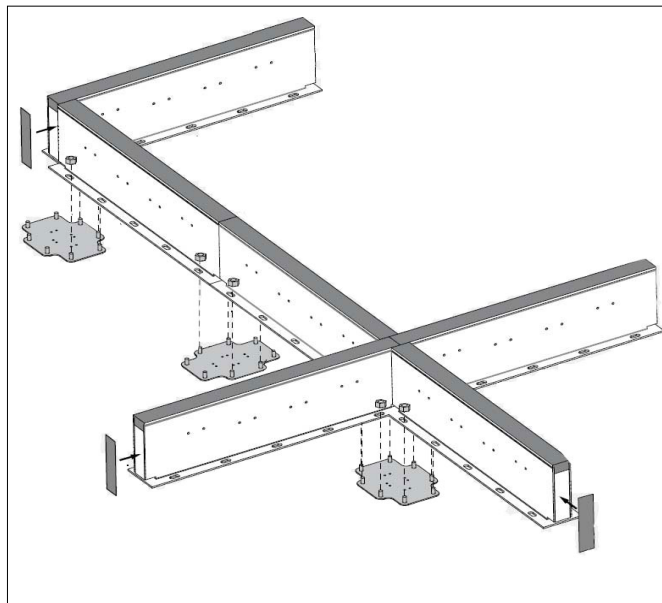


DIMENSIONS


Size 1

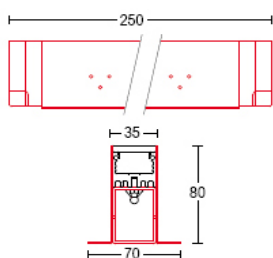

Size 2

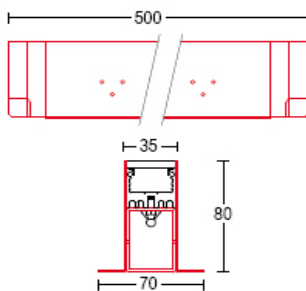

Size 3

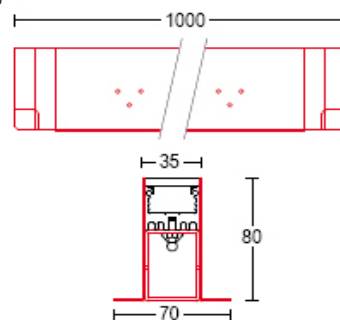

All dimensions in mm

ORDERING CODE

Wattage	Type	Size	Code	Details	+Installation Frame	+Installation Frame	Lumens*
3.5w	LED	1	G1530.BGXA400	Trace, 250mm long section, 4K	GAC530 (Ground version)	GAC607 (Wall version)	325 lm
7w	LED	2	G1531.AHXA400	Trace, 500mm long section, 4K	GAC531 (Ground version)	GAC608 (Wall version)	650 lm
14w	LED	3	G1532.FAXA400	Trace, 1000mm long section, 4K	GAC532 (Ground version)	GAC609 (Wall version)	1300 lm

*Source lumens

+ ORDERING CODE - REMOTE DRIVER **

GAC146.0024014FN-67	15w LED driver 24 VDC, IP67
GAC088.0024040FN-67	40w LED driver 24 VDC, IP67
GAC089.0024081FN-67	80w LED driver 24 VDC, IP67
GAC090.0024120FN-67	120w LED driver 24 VDC, IP67

+ ORDERING CODE - COMPONENTS **

GAC163	Power connector
GAC164	Electrical End cap
GAC550	Installation frame joiner
GAC551	Extraction tool
GAC562	Installation housing end cap for concreting

OPTIONS

3K: 3000K, Warm White
DALI: DALI on request
RGB: RGB colour changing

** Pls Specify the Quantity, Length & Configuration of the Linear Sections above and Veelite will add the other items needed.

End Cap
GAC164

Power Connector
GAC163



Installation Frame Joiner
GAC550

