



Parkdisc Series

Internal lighting



Round, low-profile, fluorescent or LED luminaire for internal car parks or low height soffits.

Construction: Steel housing with acrylic prismatic refractor. IP54. Polycarbonate refractor on request.

Finish: White as standard, other RAL colours on request, e.g. Green on Level 1, Red on Level 2 etc.

Reflector: Internal Reflector System in combination with Prismatic lens.

Lamps: 2x55w TC-L

LED: 36w or 70w LED. 4K as standard, 3K on request. L80 B10 > 100,000 hrs

Options: Internal Emergency.

Mounting: Directly to ceiling.
Options for Tru-wiring or wiring from above on request.


Manufactured: Ireland.

Product Compliance: EN 60598, CE.

Veelite


DIMENSIONS

All dimensions are in mm.

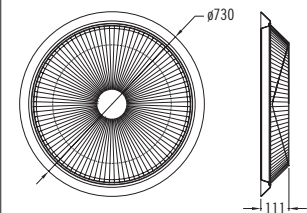


Weight 7 Kgs

Side Entry (Tru-wiring or wiring from Above on Request)

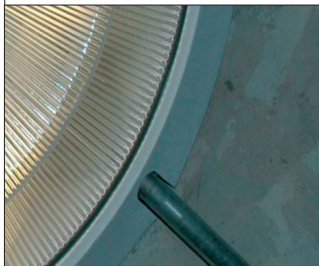

APPLICATION GUIDE

Spacing (A)	2 rows	3 rows	Version: 70w LED
4.80m	150 (0.54)	216 (0.83)	Ceiling - 2.50m
7.20m	105 (0.60)	152 (0.78)	MH - 2.5m
9.60m	83 (0.56)	120 (0.65)	Reflectances: 0.5/0.5/0.2
Average Lux Levels, based on maintained lumens, uniformity shown in brackets			

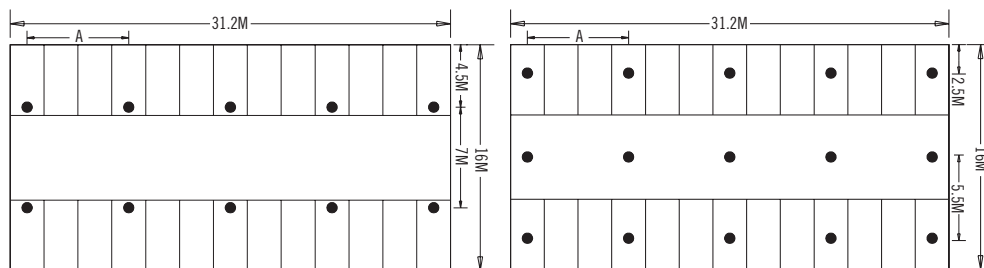

ORDERING CODE

Code	Type	Description	Lumens
3PKD60CGA	2 x 55w TC-L	Parkdisc with acrylic lens	-
3PKD60CHA	2 x 55w TC-L	Parkdisc with polycarbonate lens	-
3PKD40LGA	36w LED	Parkdisc with acrylic lens	3800 lm
3PKD80LGA	70w LED	Parkdisc with acrylic lens	7600 lm

OPTIONS:

EM: With Emergency
TW: With Thru-wiring
TE: With Top Entry wiring
PEN: Pendant Mounting
RAL: Pls specify