

Wand - PR Series

External lighting





Architecturally designed “Wand” light, ideal for plazas, pedestrian areas, etc.

Construction: Aluminium and transparent Polycarbonate lens. Available in 3.5-5m height (4m as standard).
Optical unit - IP65, IK10.
Electrical unit - IP54, IK10.
Flanged as standard.

LED: Available in 19w, 27w, 39w. Symmetric, 4000K as standard, 3000K or other colours on request.

Driver: 220-240V AC 50/60Hz.

Finish: Grey RAL 9006 as standard. Other colours available on request. Also available with wooden effect finish.

Options: Height to 5m max. (ie. Base of 2.5m, 3m, 3.5m or 4m and 1m Lens), RAL finish, Asymmetric Street Optic, Constant flux, Presence detection, DALI, 1-10v dimming.

Manufactured: EU.

Product Compliance: EN 60598; CE.

VeeLite








Wooden Effect Finish



DIMENSIONS

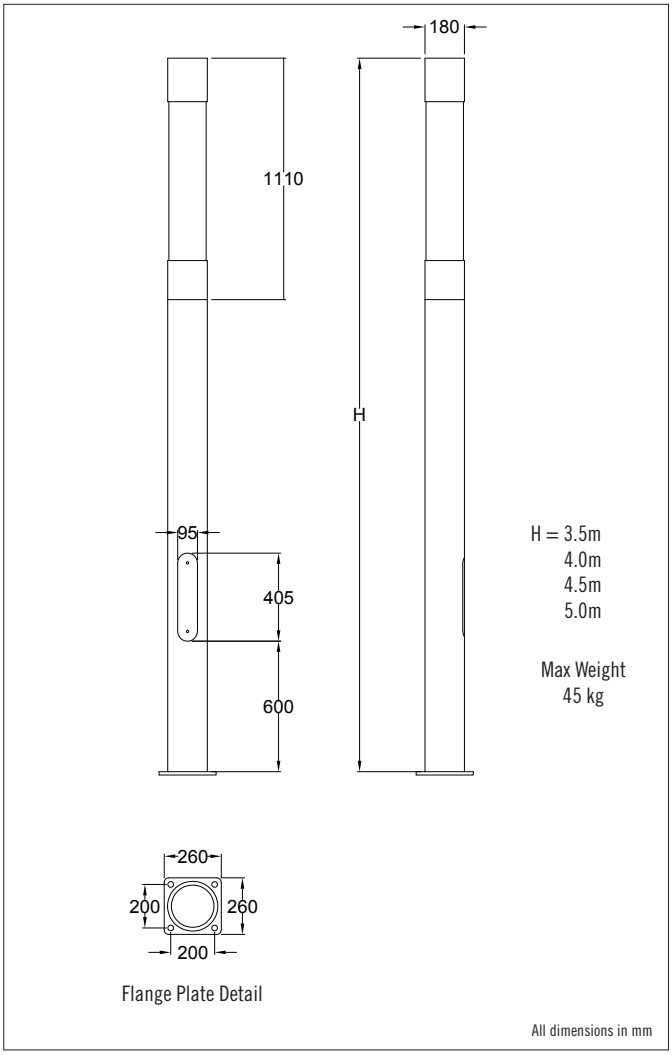

H = 3.5m
4.0m
4.5m
5.0m


Max Weight
45 kg

Flange Plate Detail

All dimensions in mm


APPLICATION GUIDE

Wand - PR Series
39w LED 4000K, Asymmetric A23
4m Height
Contours in Lux
M. Factor = 0.90



APPLICATION GUIDE

Wand - PR Series
39w LED 4000K, Symmetric C07
4m Height
Contours in Lux
M. Factor = 0.90



ORDERING CODE

Wattage	Type	Code	Details	Lumens
19w	LED	5WNP00020	4m PR Series, 350mA Driver, Symmetric, Flanged	2337 lm
27w	LED	5WNP00030	4m PR Series, 500mA Driver, Symmetric, Flanged	3310 lm
39w	LED	5WNP00040	4m PR Series, 700mA Driver, Symmetric, Flanged	4470 lm

OPTIONS

DIF:	Diffuse Lens
RAL:	PIs specify
Height:	PIs Specify Height of Base
3K :	3000K Warm White
27K :	2700K Warm White
ASY:	Asymmetric A23 Optic
DALI:	DALI Dimming
WOOD:	Wood Effect Finish