



Rett Bollard

External lighting



Architectural luminaire featuring a uniformly lit lens offered in various heights. Suitable for pathways, gardens, driveways or plaza areas.

Construction: Extruded aluminium housing. Internal LED Driver. IP65, IK08.

Lens: Polycarbonate Opal Lens, to 1m max.

Installation: Flanged, with Anchor Bolts (minimum 180mm planting depth).

Finish: Light Grey RAL 9006 as standard. Dark Grey or Wooden Effect Finish on request.




LED: Available in 4w-23w LED. 4000K as standard, 2700K or 3000K on request.

Driver: 220-240V AC 50/60 Hz


Options: Different Heights.

Manufactured: EU.

Product Compliance: EN 60598, CE, UKCA.



DIMENSIONS

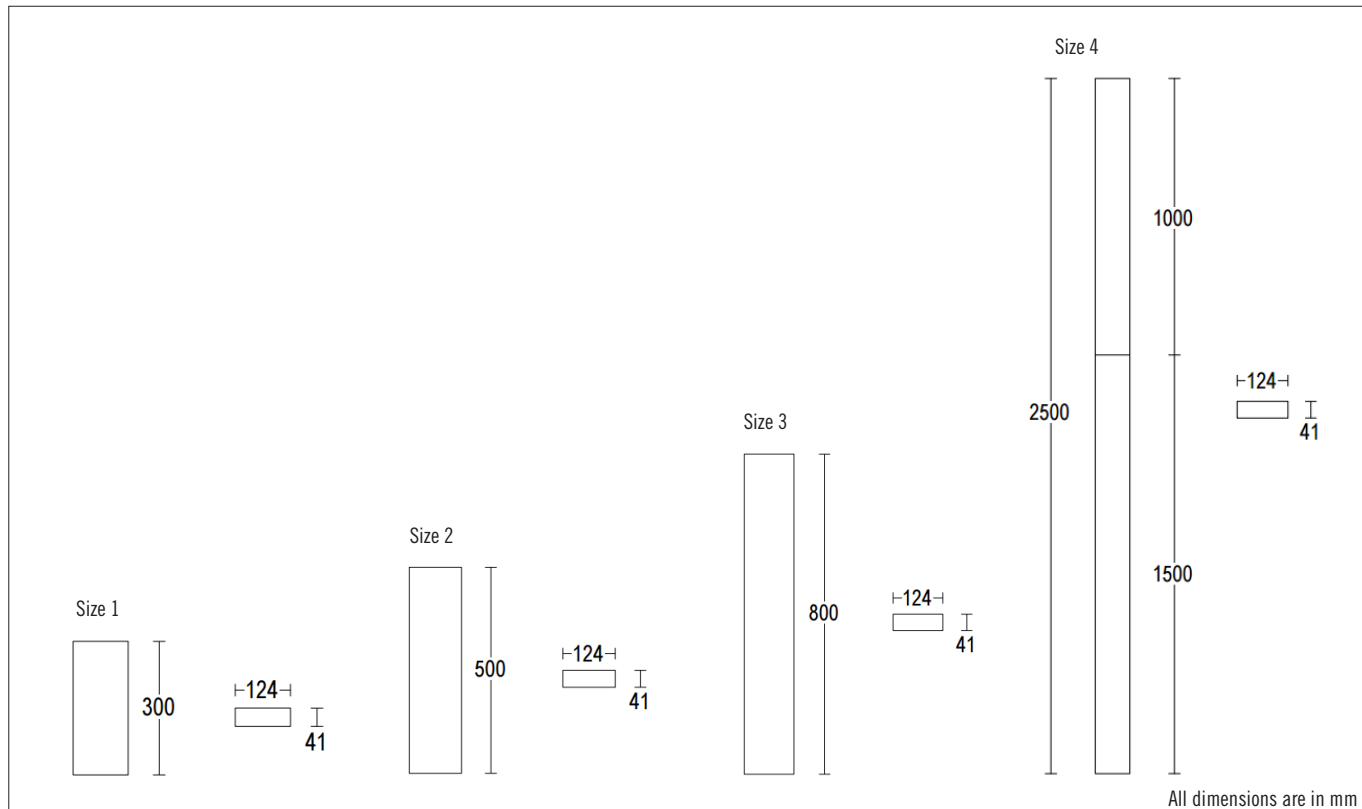

ORDERING CODE

Wattage	Type	Code	Size	Description	+Anchor Plate	Lumens*
4w	LED	G1421.BGX0400	1	Rett Bollard, Flanged, 4K, Internal Driver	GAC251	570 lm
7w	LED	G1422.AHX0400	2	Rett Bollard, Flanged, 4K, Internal Driver	GAC251	950 lm
11w	LED	G1423.CAX0400	3	Rett Bollard, Flanged, 4K, Internal Driver	GAC251	1522 lm
23w	LED	G1424.ELX0400	4	Rett Bollard, Flanged, 4K, Internal Driver	GAC293	3049 lm

*Source lumens

OPTIONS

RAL: Pls specify

.05: Dark Grey

.19: Light Grey Finish

.32: Oak Wood Effect Finish

3K: 3000K, Warm White

27K: 2700K Warm White

Further info on request · email: info@veelite.com · www.veelite.com

Specifications may change without prior notification. Ref: 379

Veelite