



Atina

External Lighting



Modern decorative LED luminaire, available in 2 sizes. Ideal for roadway applications.

Construction: Die-cast aluminium with integrated heat sink. IP66. IK08 as standard, IK10 on request.

Lens: Tempered glass as standard.

Installation: 3 mounting options:

A - Side entry (60 mm) - Standard

B - Post-top

C - Bracket mounted

(see application images).

Finish: Grey RAL 9006 as standard. Other RAL colours on request.

LED: 10w to 172w available. 4000K as standard, 3000K or other CCT on request. Asymmetric street optic A10 as standard. LED Lifetime: L80 B10 >100,000 hours. (at 25°C).

LED Driver: 220-240V AC 50/60 Hz. Internal Driver.

Mains Surge Protection: 10kV device included as standard.


Options: Various Optics, DALI, 1-10V, Programmable Dimming, Constant Lumen Output (CLO), Various Mounting Options.

Manufactured: EU.

Product Compliance: EN 60598; CE.



DIMENSIONS

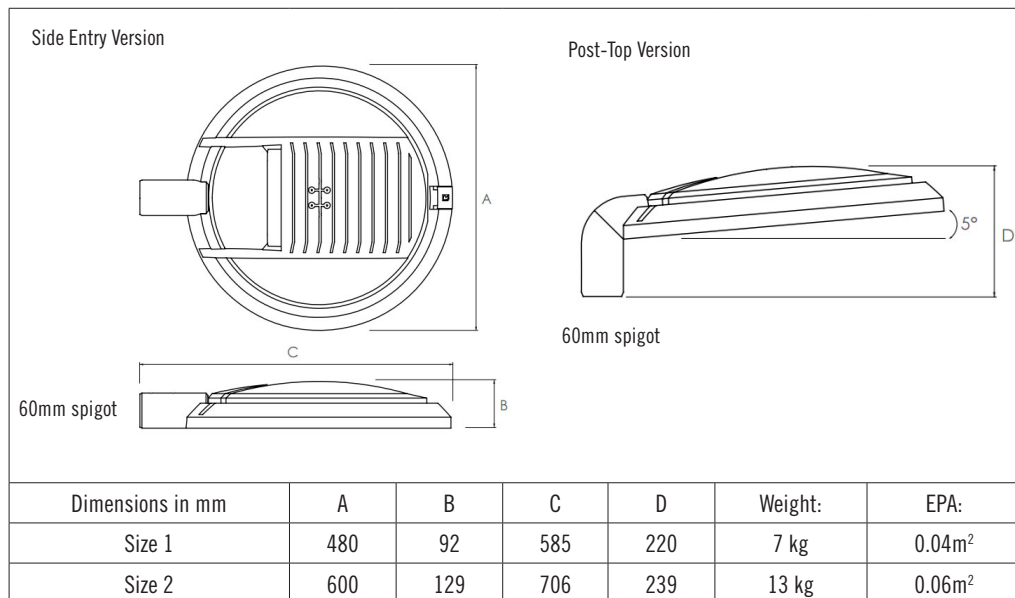

APPLICATION GUIDE


Atina Size 1 - Street Optic A10

36w LED 4K

Height 6m

Contours in Lux

M. Factor = 0.90



ORDERING CODE

Wattage	Type	Size	Code	Details	Optic	Option	Lumens
14w	8LED	1	5ATA09GLB	Atina with 500mA driver, Side Entry, 4K	A10	A11-A14, C6	1633 lm
19w	8LED	1	5ATA09GLA	Atina with 700mA driver, Side Entry, 4K	A10	A11-A14, C6	2186 lm
20w	12LED	1	5ATA10GLB	Atina with 500mA driver, Side Entry, 4K	A10	A11-A14, C6	2449 lm
27w	12LED	1	5ATA10GLA	Atina with 700mA driver, Side Entry, 4K	A10	A11-A14, C6	3278 lm
19w	16LED	1	5ATA11GLC	Atina with 350mA driver, Side Entry, 4K	A10	A11-A14, C6	2379 lm
26w	16LED	1	5ATA11GLB	Atina with 500mA driver, Side Entry, 4K	A10	A11-A14, C6	3265 lm
36w	16LED	1	5ATA11GLA	Atina with 700mA driver, Side Entry, 4K	A10	A11-A14, C6	4372 lm
38w	24LED	1	5ATA12GLB	Atina with 500mA driver, Side Entry, 4K	A10	A11-A14, C6	4898 lm
52w	24LED	1	5ATA12GLA	Atina with 700mA driver, Side Entry, 4K	A10	A11-A14, C6	6557 lm
49w	32LED	1	5ATA13GLB	Atina with 500mA driver, Side Entry, 4K	A10	A11-A14, C6	6531 lm
69w	32LED	1	5ATA13GLA	Atina with 700mA driver, Side Entry, 4K	A10	A11-A14, C6	8743 lm
73w	48LED	1	5ATA14GLB	Atina with 500mA driver, Side Entry, 4K	A10	A11-A14, C6	9796 lm
103w	48LED	1	5ATA14GLA	Atina with 700mA driver, Side Entry, 4K	A10	A11-A14, C6	13115 lm
49w	32 LED	2	5ATB13GLB	Atina with 500mA driver, Side Entry, 4K	A10	A11-A14, C6	6531 lm
69w	32LED	2	5ATB13GLA	Atina with 700mA driver, Side Entry, 4K	A10	A11-A14, C6	8743 lm
73w	48LED	2	5ATB14GLB	Atina with 500mA driver, Side Entry, 4K	A10	A11-A14, C6	9796 lm
103w	48LED	2	5ATB14GLA	Atina with 700mA driver, Side Entry, 4K	A10	A11-A14, C6	13115 lm
96w	64LED	2	5ATB16GLB	Atina with 500mA driver, Side Entry, 4K	A10	A11-A14, C6	13062 lm
136w	64LED	2	5ATB16GLA	Atina with 700mA driver, Side Entry, 4K	A10	A11-A14, C6	17485 lm
120w	80LED	2	5ATB17GLB	Atina with 500mA driver, Side Entry, 4K	A10	A11-A14, C6	16327 lm
172w	80LED	2	5ATB17GLA	Atina with 700mA driver, Side Entry, 4K	A10	A11-A14, C6	21858 lm

OPTIONS

RAL: Pls Specify

PT: Post-top version (D60)

PC: Mini Photocell

DALI: DALI Dimmable

1-10V: 1-10V Dimmable

CLO: Constant Lumen Output

PRO: Programmed Dimming

A11: Street Optic A11

A12: Street Optic A12

A13: Street Optic Wide A13

A14: Forward Throw Optic A14

C6: Symmetric Optic C6

3K: 3000K, Warm White

2.7K: 2700K, Warm White

MRN: Marine Finish

IK10: IK 10 Protection

Further info on request · email: info@veelite.com · www.veelite.com

Specifications may change without prior notification. Ref: 395

Veelite