



Circo

External lighting



Architectural LED post-top luminaire for residential or pedestrian areas, gardens, parks, etc.

Construction: Made of die cast aluminium with polycarbonate lens. IP66. IK10. Hood is removable for access/maintenance.

Lens: Polycarbonate.

Installation: Post-top on 60mm Diameter Spigot (80mm high).

Finish: Grey RAL 9006 as standard, other colours on request.

LED: Available in 19w - 69w LED. 4000K as standard, 3000K or other on request. Symmetric Optic as standard, Asymmetric Forward Throw or Street Optic on request.

Life: L80 B10 > 100,000 hours. (69w version at 25°C).

Driver: 700mA as standard. 350mA, 500mA on or other on request.

Mains Surge Protection: 10kV device included as standard.

Options: Various Optics, DALI, photocell, Programmable dimming, CLO, wall mounting option on request, choice of pole / wall brackets, motion detector, etc.

Manufactured: EU

Product Compliance: EN 60598; CE.

Veelite

APPLICATION GUIDE


Circo - Symmetric - C6 Optic

36w LED 4K

Height 6m

Contours in Lux

M. Factor = 0.90

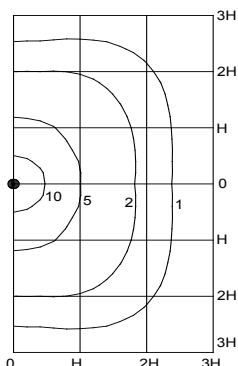

APPLICATION GUIDE


Circo - Asymmetric Street Optic - A10

36w LED 4K

Height 6m

Contours in Lux

M. Factor = 0.90



APPLICATION GUIDE


Circo - Street Optic Wide - A13

36w LED 4K

Height 6m

Contours in Lux

M. Factor = 0.90



APPLICATION GUIDE


Circo - Forward Throw Optic - A14

36w LED 4K


Height 6m

Contours in Lux


M. Factor = 0.90



DIMENSIONS

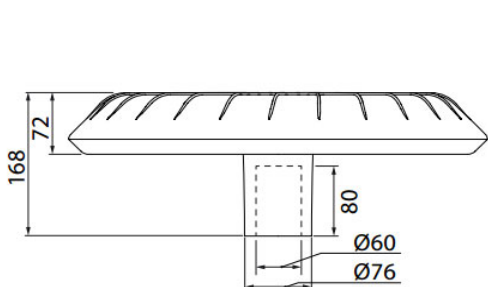

All Dimensions in mm

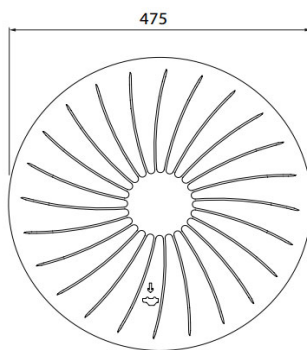

EPA: 0.03m². Weight: 6kg



Arm Mount Versions

ORDERING CODE

Wattage	Type	Code	Description	Optic	Option	Lumens
19w	16LED	5CIR09LGA	Post-top luminaire, 4K, Symmetric, 350mA	C6	A10,A13, A14	2121 lm
26w	16LED	5CIR10LGA	Post-top luminaire, 4K, Symmetric, 500mA	C6	A10,A13, A14	2912 lm
36w	16LED	5CIR11LGA	Post-top luminaire, 4K, Symmetric, 700mA	C6	A10,A13, A14	3899 lm
27w	24LED	5CIR12LGC	Post-top luminaire, 4K, Symmetric, 350mA	C6	A10,A13, A14	3186 lm
38w	24LED	5CIR12LGB	Post-top luminaire, 4K, Symmetric, 500mA	C6	A10,A13, A14	4368 lm
52w	24LED	5CIR12LGA	Post-top luminaire, 4K, Symmetric, 700mA	C6	A10,A13, A14	5847 lm
35w	32LED	5CIR13LGC	Post-top luminaire, 4K, Symmetric, 350mA	C6	A10,A13, A14	4243 lm
49w	32LED	5CIR13LGB	Post-top luminaire, 4K, Symmetric, 500mA	C6	A10,A13, A14	5824 lm
69w	32LED	5CIR13LGA	Post-top luminaire, 4K, Symmetric, 700mA	C6	A10,A13, A14	7797 lm

OPTIONS

RAL: Pls Specify
PC: Mini Photocell
DALI: DALI Dimmable
1-10V: 1-10V Dimmable
CLO: Constant Lumen Output
PRO: Programmed Dimming
ST: Street Optic (A10)
STW: Street Optic Wide (A13)
FT: Forward Throw Optic (A14)
3K: 3000K Colour Temp.
1ARM: 1 Arm Mount Version
2ARM: 2 Arm Mount Version
MRN: Marine Finish

Further info on request · email: info@veelite.com · www.veelite.com

Specifications may change without prior notification. Ref: 397

Veelite