



Luna

Internal Lighting



IP65 Corrosion Resistant LED Luminaire for Energy Saving in new or refit car parks, corridors, storage rooms, etc.

Construction: Die cast Aluminium Housing with Polycarbonate Diffuser.
IP65. IK08.
Temperature: -30°C to +40°C.

Installation: Surface Mounting.


LED: 25w -65w LED, 4000K (5000K on request).
100,000 Hour rated lifetime (L70)

Option: 0-10V Dimming, Motion Sensor Control.

Product Compliance: EN 60598; CE.




DIMENSIONS



APPLICATION GUIDE

Version: 40w LED			Version: 65w LED		
Spacing (A)	2 rows	3 rows	Spacing (A)	2 rows	3 rows
4.80m	122 (0.71)	173 (0.85)	4.80m	216 (0.70)	308 (0.83)
7.20m	86 (0.62)	122 (0.73)	7.20m	152 (0.63)	217 (0.73)
9.60m	67 (0.47)	97 (0.54)	9.60m	120 (0.48)	172 (0.54)
Ceiling 2.50m		MH - 2.50m		Reflectances: 0.5/0.5/0.2	
Average Lux Levels, based on 0.9 maintenance factor, uniformity shown in brackets					

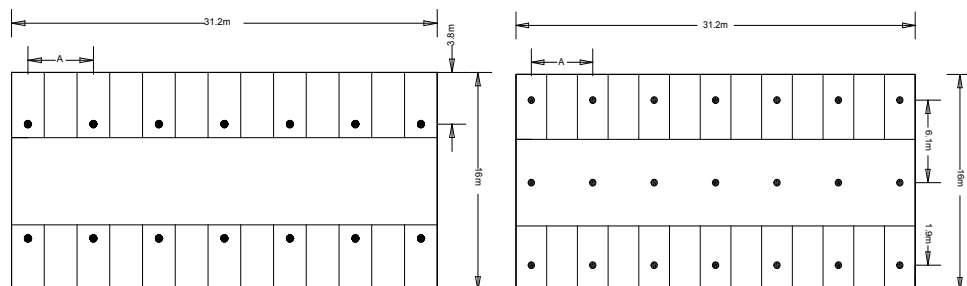

ORDERING CODE

Wattage	Type	Code	Description	Lumens
25w	LED	3LUN025L	Luna LED luminaire	3375 lm
40w	LED	3LUN040L	Luna LED luminaire	5400 lm
60w	LED	3LUN060L	Luna LED luminaire	8100 lm
65w	LED	3LUN065L	Luna LED luminaire	8775 lm

OPTIONS

0-10V: 0-10 Dimming
SEN: Motion Sensor