



Merrion Series

External lighting



Classical shaped luminaire in 2 sizes, with a choice of mounting brackets, wattages to 134w LED.

Construction: Die-cast dome, with spun aluminium canopy. IP65.

Lens/diffuser: Clear shallow polycarbonate bowl as standard. Deep bowl option (see photo on next page) available in large size only.

Installation: Pendant mounted with a choice of brackets. Swan-neck bracket shown in product picture above. Product can be altered to match existing brackets on site.

Finish: Black, RAL 9005 as standard, inside white. Other colours on request.

LED: 19w-134w LED, 4000K CRI >70 as standard, other colours, CRI on request.

LED Lifetime: L90 B10 >100,000 hrs (at 25°C).

Driver: 220-240V AC, 50/60Hz. 700mA as standard, 350mA or 500mA or other on request.

Mains Surge Protection: 10 kV device included as standard.


Options: Mini-Photocell, Constant Light Output (CLO), DALI, D4i, Part-night Dimming, various CCT.

Manufactured: Ireland.


Product Compliance: EN 60598, CE.




LUMINAIRE DIMENSIONS - Mini-Merrion Dims in Brackets

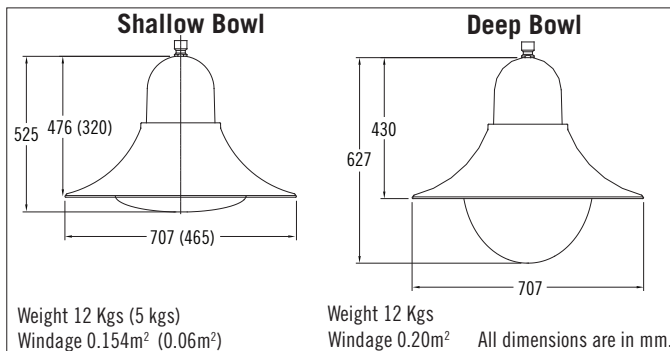

BRACKET DIMENSIONS - to suit Ø76mm post top pole

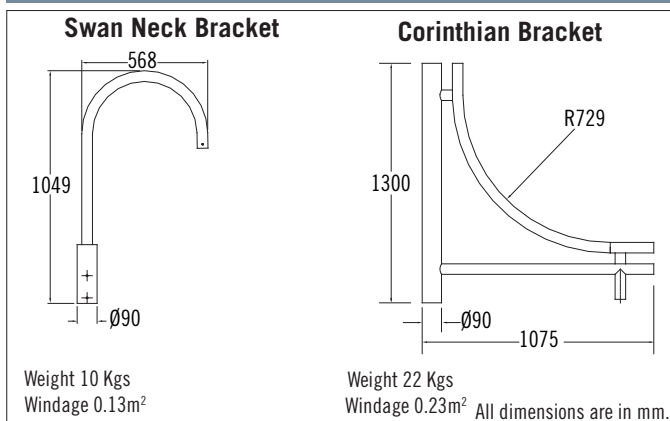

APPLICATION GUIDE

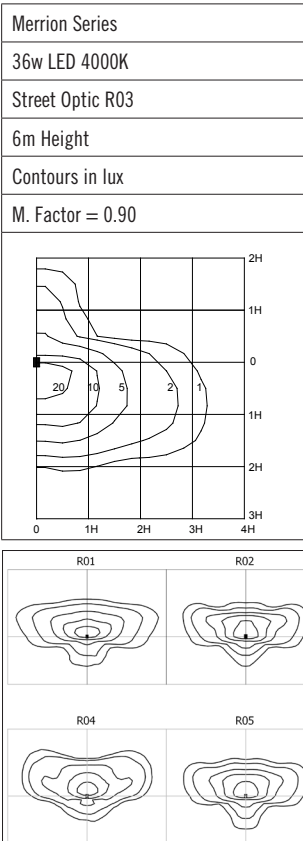

ORDERING CODE

Wattage	Type	Mini Merrion	Merrion	Details	Lumens*
19w	8 LED	5MMA02LBA	5MER02LBB	Merrion Lantern, 700mA, 4K, Street Optic R03	2450 lm
27w	12 LED	5MMA03LBA	5MER03LBB	Merrion Lantern, 700mA, 4K, Street Optic R03	3675 lm
36w	16 LED	5MMA04LBA	5MER04LBB	Merrion Lantern, 700mA, 4K, Street Optic R03	4901 lm
52w	24 LED	5MMA06LBA	5MER06LBB	Merrion Lantern, 700mA, 4K, Street Optic R03	7351 lm
68w	32 LED	5MMA08LBA	5MER08LBB	Merrion Lantern, 700mA, 4K, Street Optic R03	9801 lm
102w	48 LED	-	5MER11LBB	Merrion Lantern, 700mA, 4K, Street Optic R03	14702 lm
134w	64LED	-	5MER14LBB	Merrion Lantern, 700mA, 4K, Street Optic R03	19603 lm

* Luminaire lumen output, and will vary slightly depending on the optic used. Data shown for standard street optic R03

+ ORDERING CODE for brackets

Code	Description
5MER00002	Single Swan Neck Bracket
5MER00005	Twin Swan Neck Bracket (Parallel Type)
5MER00006	Single Corinthian Bracket
5MER00007	Twin Corinthian Bracket

OPTIONS

RAL: Pls specify
PC: Mini-Photocell
DBW: Deep Bowl
2.7K: 2700 K
3K: 3000 K
5K: 5000 K
CLO: Constant Light Output
R01: Street Optic R01
R02: Street Optic R02
R03: Street Optic R03
R04: Street Optic R04
FTA: Forward Throw Optic FTA
SYM: Symmetric Optic
DALI: Dali Dimming
PRO: Programmed Dimming
1-10V: 1-10V Dimming
D4i: D4i Driver

Further info on request · email: info@veelite.com · www.veelite.com

Specifications may change without prior notification. Ref: 936

Veelite