





Mini Pathway Series

Ground Light



Compact in-ground recessed light for pathways or similar applications. Light is diffused from the sides out of 1, 2 or 4 apertures in the stainless steel trim. Raised grate creates light pattern on the ground.

Construction: Die-cast aluminium housing. IP68. IK10.

Installation: Suitable drainage area required. Separate Installation frame.

Finish: Stainless Steel.

LED: 1w, 1.5w or 2w LED. 4K as standard, 3K on request.

Driver: Remote driver required (to be located in sealed IP rated housing).




Options: DALI, 3K, larger version to 20w (see separate leaflet).

Manufactured: EU.


Product Compliance: EN 60598, CE.

Warning: Groundlights can be a glare, slip, trip or burn hazard. Vandalism or accidental breakage can result in electrical, glass or trip hazard. Locate to avoid or minimise these hazards.

Veelite



DIMENSIONS

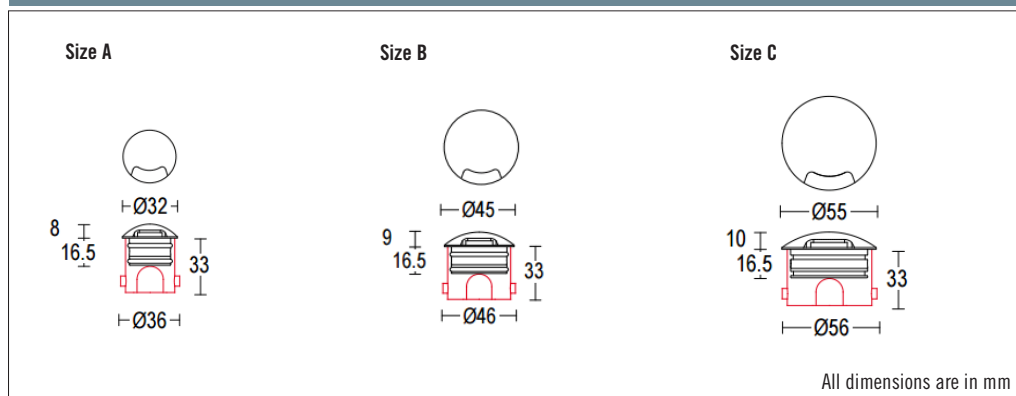

ORDERING CODE (excluding Remote Driver)

Wattage	Type	Size	Code - One Beam	Code - Two Beams	Code - Four Beams	Details	Lumens*	+ Installation Frame	Current
1w	LED	A	G1377.BAX0400	G1378.BAX0400	-	Mini Pathway Series, 4K	130 lm	GAC610	350mA
1.5w	LED	B	G1379.BAX0400	G1380.BAX0400	G1381.BAX0400	Mini Pathway Series, 4K	180 lm	GAC611	500mA
2w	LED	C	G1382.BAX0400	G1383.BAX0400	G1384.BAX0400	Mini Pathway Series, 4K	340 lm	GAC312	700mA

*ORDERING CODE - Remote Driver

Wattage	Size	Code	Number of fittings per driver	Details
1w	A	GAC021.0350014FN-67	1-10	Remote driver to operate 350mA Size A Mini-Pathway series**
1.5w	B	GAC083.0500014FN-67	1-7	Remote driver to operate 500mA Size B Mini-Pathway series**
2w	C	GAC084.0700014FN-67	1-5	Remote driver to operate 700mA Size C Mini-Pathway series**

*Source lumens

**Please specify whether IP20 or IP67 driver required