





Modular Series

External lighting



Architectural multifunctional modular Mast, ideal for urban environments, plazas, squares, pedestrian areas etc. designed for integrating public services, such as lighting, sound, wifi, power, cameras etc.

Construction:

Three sizes of Base unit from Extruded Aluminium IK10. Modular Units can be added to bring the total height to 6m max.

Lighting Modules - Cast Aluminium with Polycarbonate Lens. IP66, IK10. Available in 1.5-6m max height. Customized depending on modules required. Flanged as standard.

LED: 8-24 LED per module, 1080 to 6296 lumens depending on arrangement. Symmetric, Asymmetric or Spot/Floodlight optics available. 10°, 25°, 40°, 115° Beam options. 4000K as standard, 3000K or other colours on request.

Finish: Grey RAL 9006 as standard.

Options: Multiple options including: Various Lighting Modules and related options (beam type, CCT, DALI etc) Wi-fi Module.

Communication via NEMA or Zhaga Socket.

USB Charging Points.

Loudspeaker.

HDTV Camera.

Beacon Lighting.

Customizable Decorative Section.


Light Management module: provides 180° or 360° motion detection to control Lighting levels.

Manufactured: EU.


Product Compliance: EN 60598; CE.

Veelite

DIMENSIONS

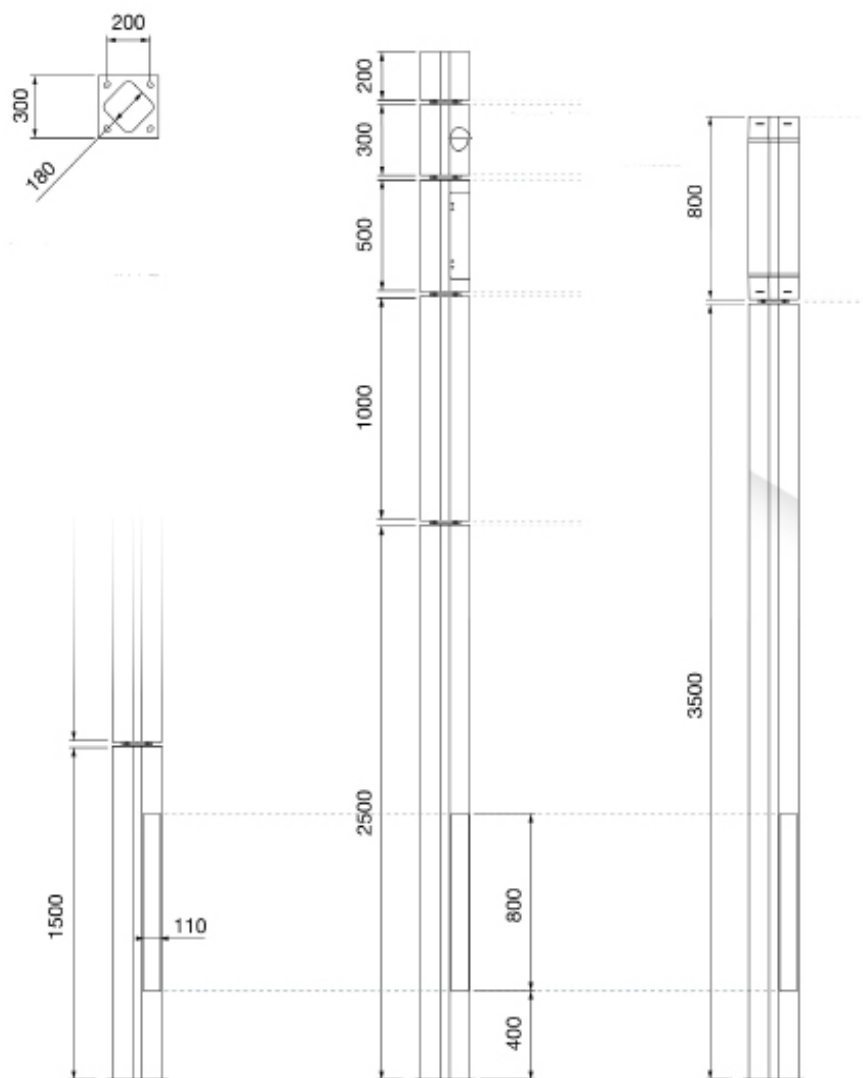

Dimensions in mm

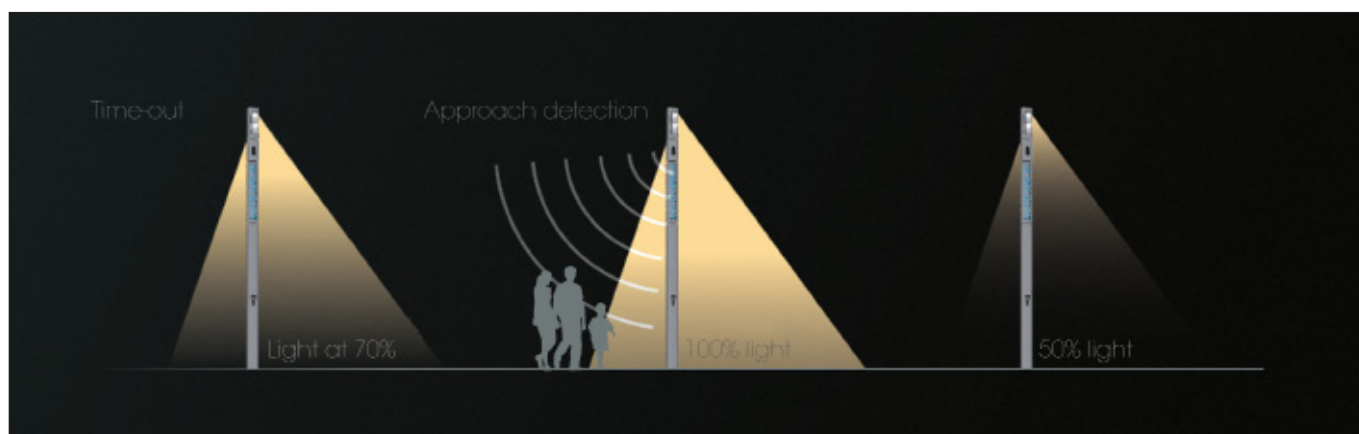

Veelite

MODULES



WiFi Module



Loudspeaker Module



Light management



Nema/Zhaga Module




CCTV Module




USB Charger Module



Decorative Modules

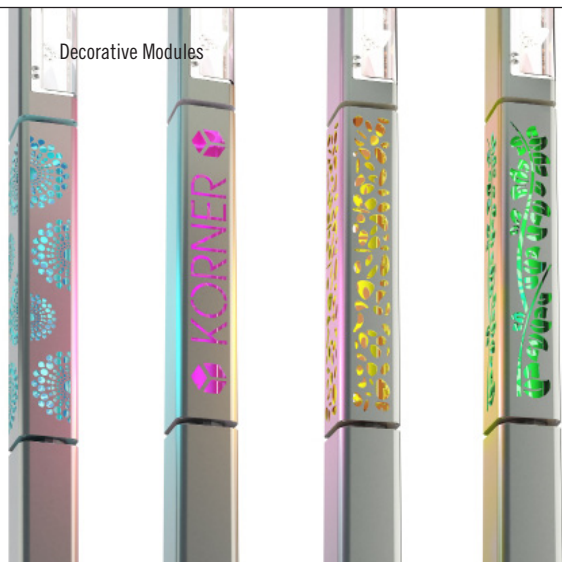

Spacer Modules - 300mm, 500mm or 1000mm

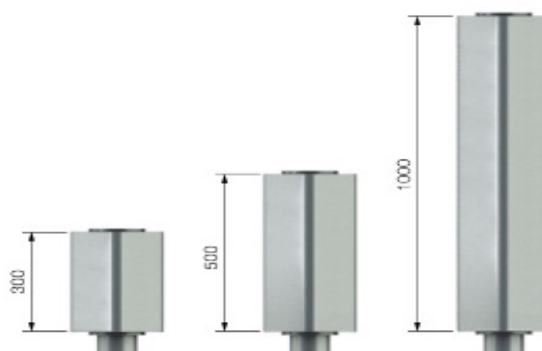

MODULES - LIGHTING

4 Sided Light (Symmetric)



360° Rotation





Asymmetric and Spotlight Options



Light Beacon (Custom colours)



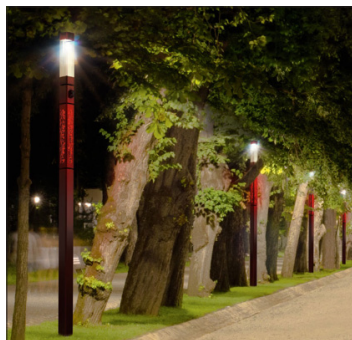

ORDERING CODE

Base	Code	Description
1.5m	5MOD15000	Modular Mast, Flanged, RAL 9006 Grey
2.5m	5MOD25000	Modular Mast, Flanged, RAL 9006 Grey
3.5m	5MOD35000	Modular Mast, Flanged, RAL 9006 Grey

OPTIONS

3K: 3000K, Colour Temperature
MS: Motion Sensor
RAL: Please specify
Modular Sections:
mW: Wifi/Wlan Module
mL: Loudspeaker Module
mLM: Light Management (Sensor)
mN: Nema/Zhaga Module
mV: CCTV module
mU: USB Charger Module
mD: Decorative Module (Specify)
mS1: Spacer 1m
mS5: Spacer 0.5m
mS3: Spacer 0.3m
L2: 2 sided Light Module
L4: 4 sided Light Module
LB: Light Beacon (Specify Colour)
LS: Spot Beams (Specify Beam)